



SYMBOL DEFINITION		TOTAL NO OF INSPECTIONS REQUIRED	18
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.		LAST NO. USED	12

MISSING SYMBOLS				REVISION HISTORY		AUTH	DR	AP/D	AP/D
DATE	STG	REV	N/P	CHG	ZONE				
21N001	R	01	-	-		CLEARED REV COL & ALL PARTS - REVISED MAT'L SPEC	217409	JAN	RVP RC
19MY03	R	02	-	-		15300017 - OBSOLETE	241251	EOV	EDV RC
29SE04	R	03	-	-		DIM 9 TOLERANCE WAS $\pm 0.3/-0.45$ , ADDED DIMS 11 AND 12 TO PD AND TBT TO TD	258705	MJM	MJM TM
24MY06	R	04	-	-		15324857 - REVISED TOQ REVISION LEVEL	280148	JS	JS TM
25OC06	R	05	-	-		15324857 - REMOVED DIM #11	286257	JTZ	JVM WTM
17DE06	R	06	-	-		ALL ACTIVE PARTS - REVISED NOTE #2	287948	EES	EES MM

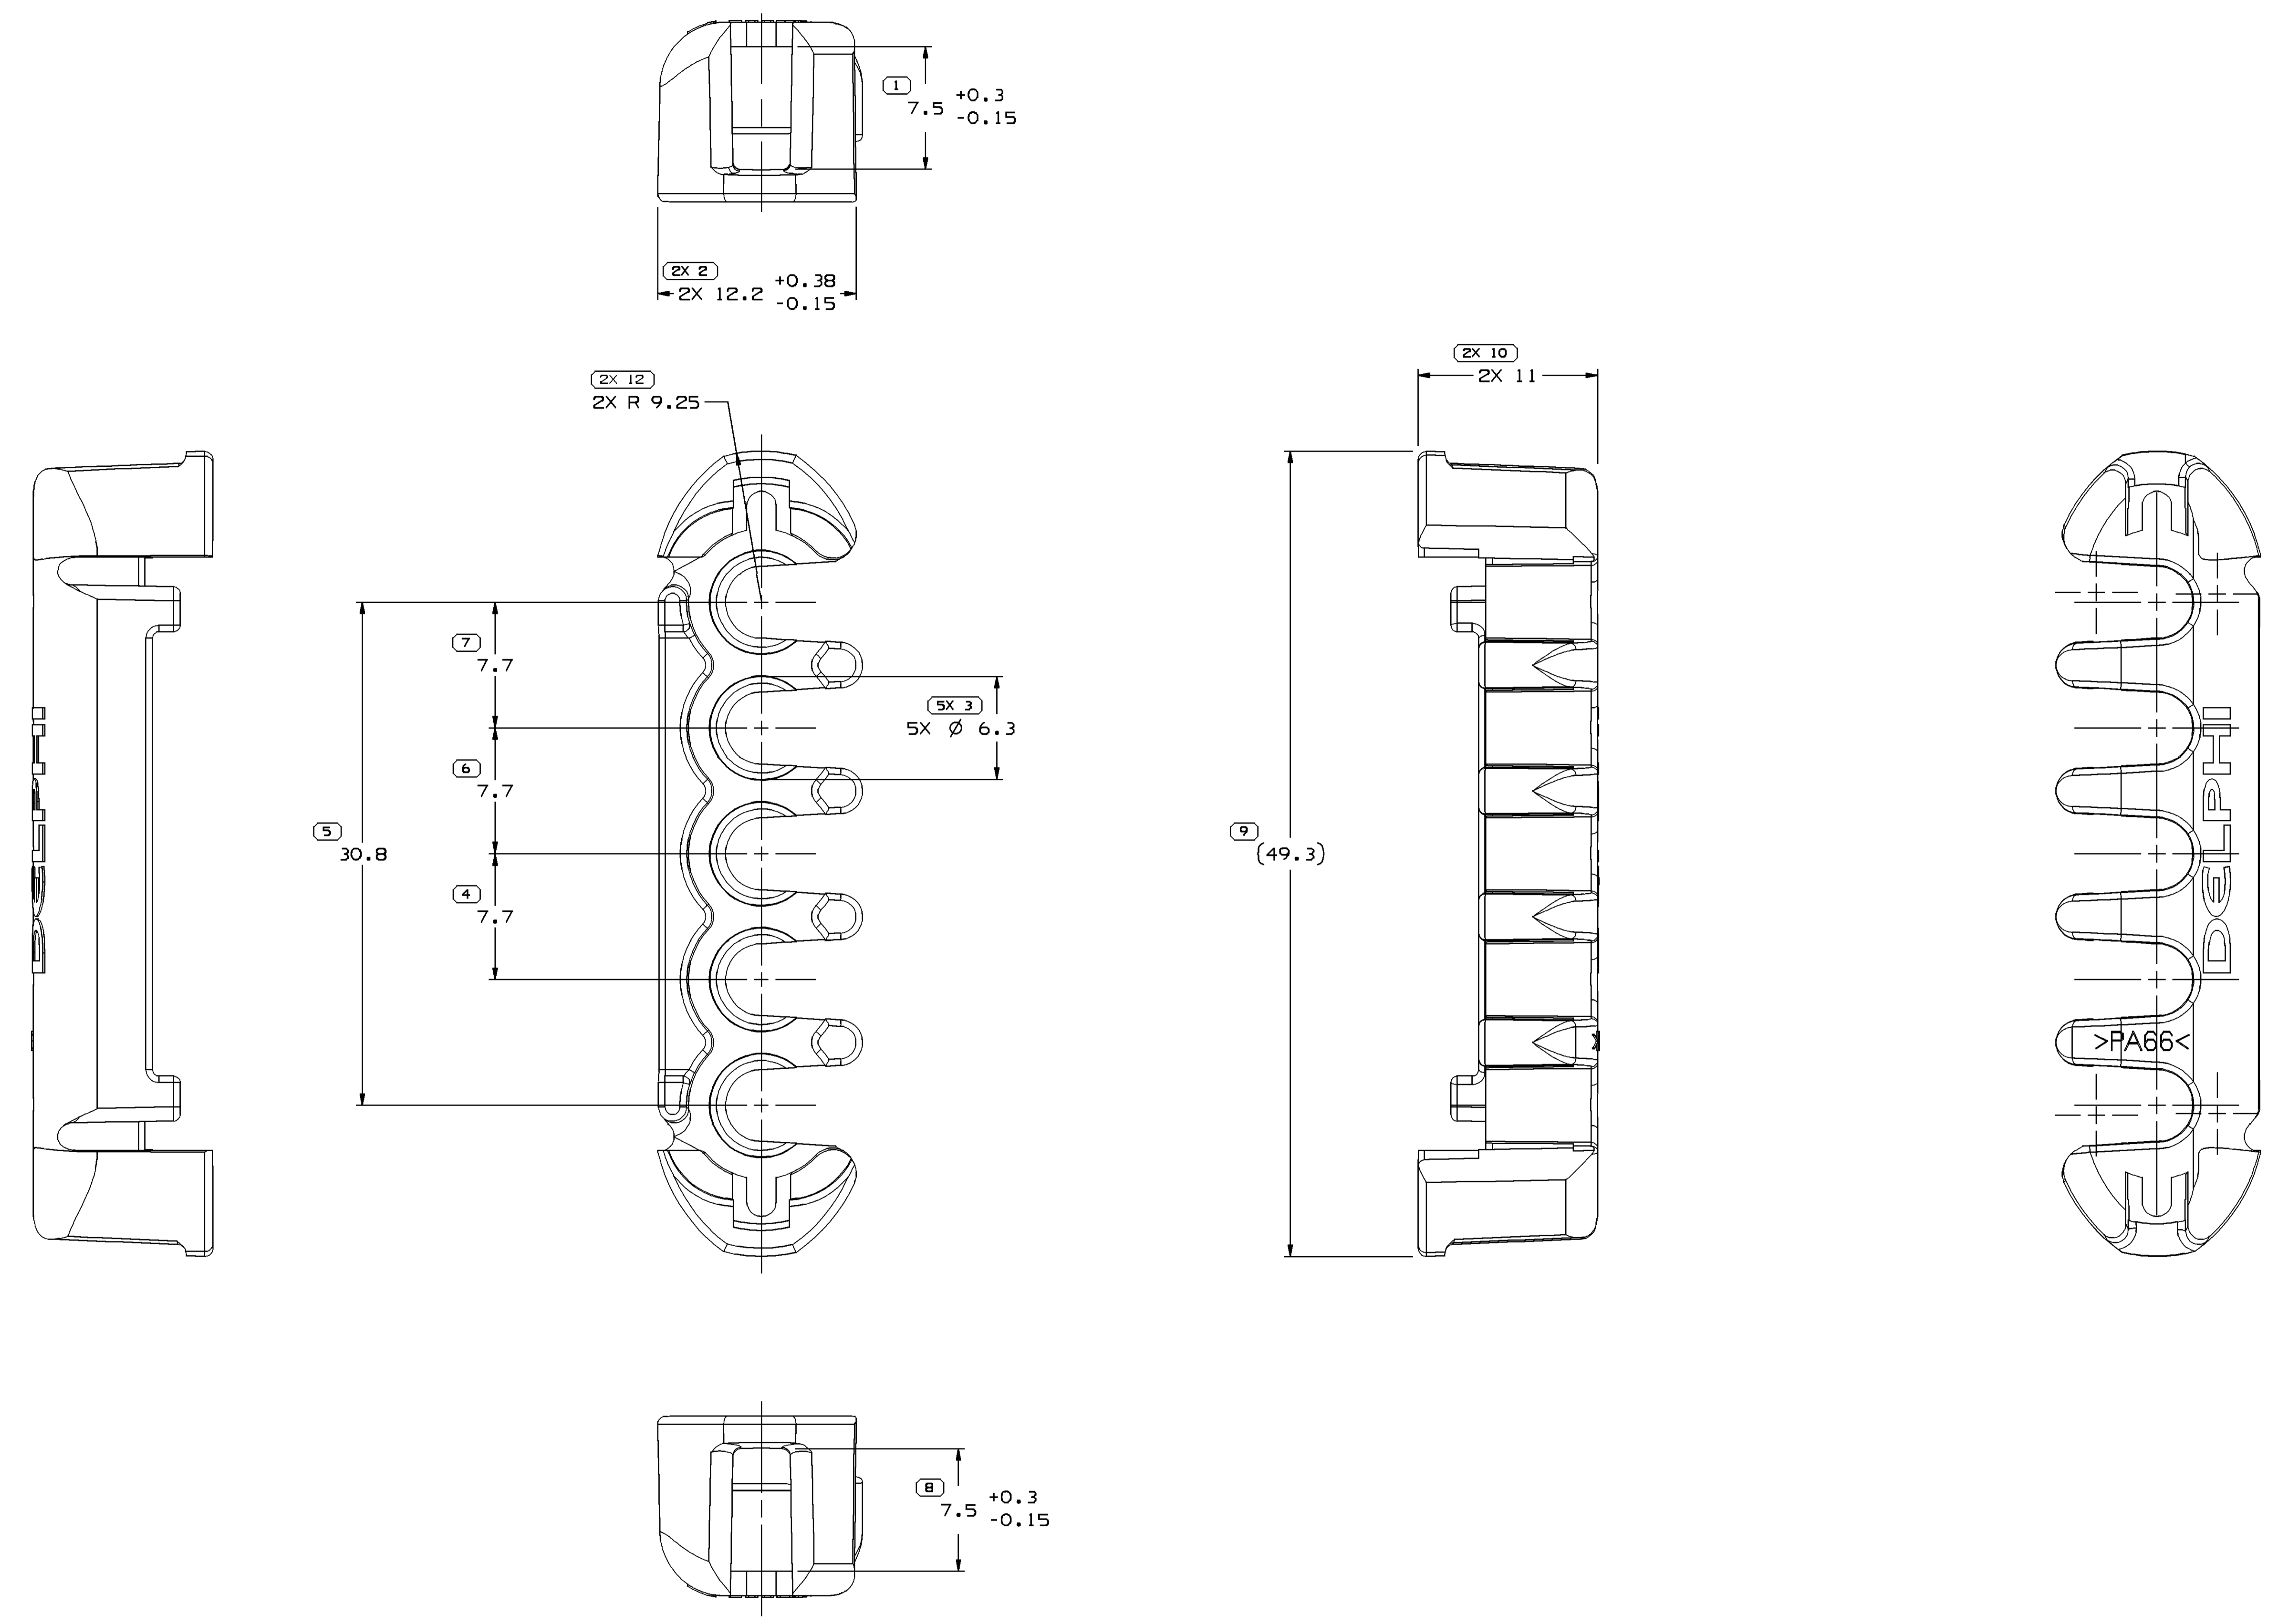

- NOTES
- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:  
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
  - MATERIAL RECYCLING CODE PER ISO 11469. (2.3)X(0.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
  - THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
  - REFERENCE MATING COMPONENTS OR EQUIVALENT:  
CONNECTOR 15300011
  - MAX CABLE DIAMETER THAT WILL FIT PART IS  $\phi 4.2$
  - (2.3)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".

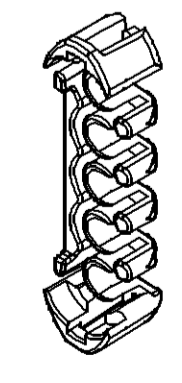

PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION AND COLOR	VOL CM <sup>3</sup>	REPLACED BY
15324857	02	AD		M3592001 PA66 IM HS BLK	1.744	
15300017	04	AA	OBSOLETE	M3592008 PA66 IM HS BLU	1.744	15324857

DIMENSIONAL RANGE (MM)	TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGULAR TOLERANCE
FROM > 0 TO > 20	$\pm 0.15$	$\pm 1.2$
> 20 TO > 30	$\pm 0.2$	$\pm 1.2$
> 30 TO > 70	$\pm 0.3$	$\pm 1.2$
> 70 TO > 100	$\pm 0.4$	$\pm 1.2$
> 100 TO > 150	$\pm 0.5$	$\pm 1.2$
> 150 TO > 200	$\pm 0.6$	$\pm 1.2$
> 200 TO > 250	$\pm 0.7$	$\pm 1.2$
> 250 TO > 300	$\pm 0.8$	$\pm 1.2$
> 300 TO > 400	$\pm 1.0$	$\pm 1.2$

PART DRAWING	
STYLE	SEE CHART
VOLUME (CM <sup>3</sup> )	DISTR CODE
	D
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS MODIFIED BY THE IN-SOURCE DIMENSIONING AND TOLERANCE ADDENDUM-2001. SEPARATE WRITINGS OR REFERENCES MAY BE BASED SEPARATELY PERMISSIBLE OF DIMENSION REFERENCES.	
ALL DIMENSIONS ARE IN MILLIMETERS	
THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	

**DELPHI**  
DELPHI PACKARD ELECTRIC SYSTEMS  
WARREN, OH

DR	DATE
APV01 R. GUTIERREZ	23AU99
APV02 C. MIRANDA	23AU99
APV03 J. REIDER	30AU99
APV04	
APV05	

MATERIAL: SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

SEE CHART

DRAWING NAME: TAXI LOCK SECONDARY TPA M/P

DRAWING NUMBER: 15324858

SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P
A0	5:1	1	1	1	06	-