



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	16MAY2023	BDA	MB
	BI	"MIN" NOTE REMOVED IN DIMN "L"	28NOV2024	AN	SL

PART AS SUPPLIED

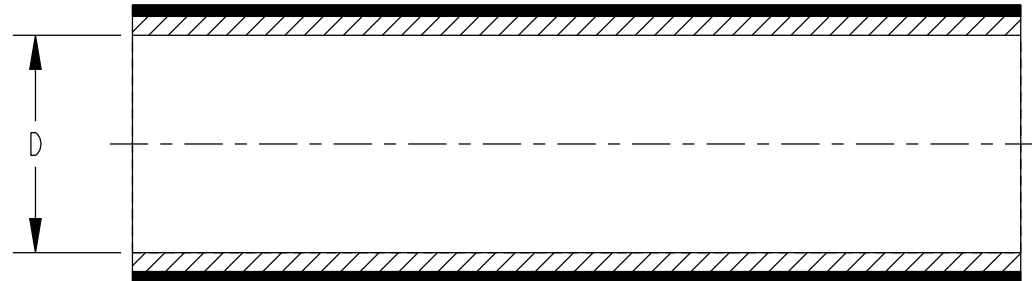

PART FULLY RECOVERED

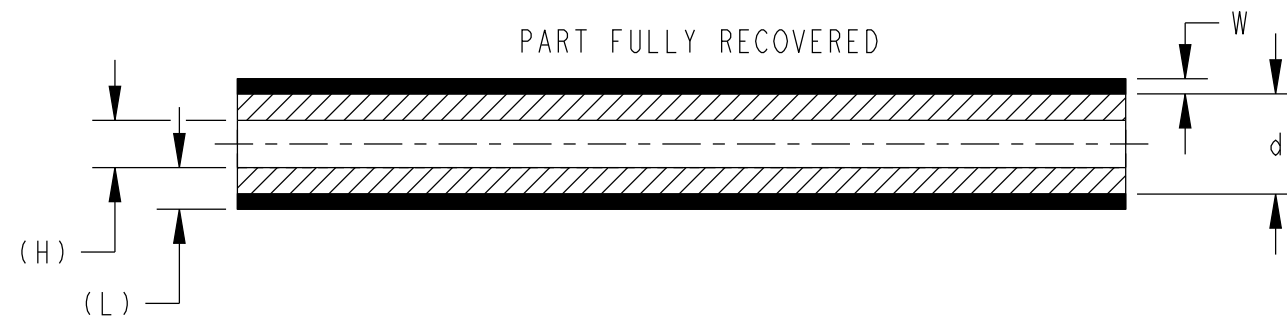

PRODUCT DIMENSIONS

PART NO	AS SUPPLIED		AS RECOVERED							
	MINIMUM EXPANDED I.D. (D)		JACKET & LINER DIA (H)		MAXIMUM RECOVERED JACKET I.D. (d)		MINIMUM RECOVERED JACKET WALL (W)		RECOVERED TOTAL WALL (L)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
QSZH-125-NR1	5.75	0.226	1.25	0.049	2.65	0.104	0.60	0.024	1.10	0.043
QSZH-125-NR2	7.50	0.295	1.65	0.065	3.45	0.136	0.70	0.028	1.40	0.055
QSZH-125-NR3	11.00	0.433	2.40	0.094	4.65	0.183	0.80	0.031	1.80	0.071
QSZH-125-NR3A	14.00	0.551	3.00	0.118	5.90	0.232	0.90	0.035	2.15	0.085
QSZH-125-NR4	18.30	0.720	4.35	0.171	7.40	0.291	0.90	0.035	2.20	0.087

PRODUCT INFORMATION


- NON-FLAME RETARDANT
- OUTER JACKET: IRRADIATED MODIFIED POLYOLEFIN COLOUR: CLEAR  
INNER LINER: THERMOPLASTIC HOT-MELT ADHESIVE COLOUR: BLACK
- SHRINK RATIO 4:1
- TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING
- DIMENSION H & L (JACKET & LINER) VALUE IS FOR REFERENCE ONLY

STANDARD CUTTING TOLERANCES (mm)

CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm (Inches)



MATERIAL  
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.1
2 PLC	±0.01
3 PLC	±0.001
4 PLC	±0.0001
ANGLES	±
FINISH	-

DWN 16MAY2023  
BASAVARAJA D A

CHK 16MAY2023  
SELVAPANDIAN B

APVD 16MAY2023  
MAYO BAKARE

PRODUCT SPEC  
108-120002

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING



NAME  
QSZH-125  
DUAL WALL, HEAT-SHRINKABLE,  
NON-FLAME RETARDED TUBING

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 - QSZH-125

SCALE NTS SHEET 1 OF 1 REV BI